nu-tank
CLEAN • STRONG • RELIABLE

1300 36 11 10
www.nutank.com.au
sales@nutank.com.au

PRODUCT SHEET

DIAMETER	1800 MM
INLET HEIGHT	2100 MM
OVERALL HEIGHT	2230 MM

Tank as seen in Mountain Blue

PRODUCT CODE:
PTRNWA1100TL

1,100GAL /5,000L TALL WATER TANK

FEATURES

- **Fully self supporting roof** (no internal poles or frames)
- **Manufactured from proven UV stabilised Australian standard materials** (tested in the field for over 25 years)
- **Manufactured in computerised ovens** (not open flame)
- **Ribbed sidewall** (extra strength)
- **Thicker walls at base** (supports pressure)
- **Poly fused & welded fittings** (stops fitting split)

FREE INCLUSIONS[1]

300mm Strainer & Light Guard	Poly Fused & Welded Fitting[2]
90mm Overflow	Ball Valve[3]

[1] Additional fittings are available on request
[2] Poly Fused & Welded Fitting sizes are available in 1″, 1.5″ and 2″
[3] Ball Valve sizes are available in 1″, 1.5″ and 2″
*Inclusions may change without notice, check with sales prior to ordering

COLOURS AVAILABLE

CB Surf Mist	Birch Grey *(CB Dune)*	CB Shale Grey	Armour Grey *(CB Windspray)*	CB Wallaby	CB Basalt	Slate Grey *(CB Woodland Grey)*
CB Monument	Black *(CB Night Sky)*	Mountain Blue *(CB Deep Ocean)*	Metal Grey *(CB Ironstone)*	CB Cove	Evening Haze	Merino Beige *(CB Paperbark)*
Gully	CB Jasper	Smooth Cream *(CB Classic Cream)*	Desert Haze *(CB Sandbank)*	Wheat	Earthtone *(CB Bushland)*	CB Mangrove
Mist Green *(CB Pale Eucalypt)*	Rivergum *(CB Wilderness)*	Heritage Green *(CB Cottage Green)*	Heritage Red *(CB Manor Red)*			

NB: COLORBOND® and colour names are registered trademarks of BlueScope Steel Limited®. Colour names, shown in brackets, are trademarks of BlueScope Steel Limited). Colours may vary due to screen and printer calibrations.

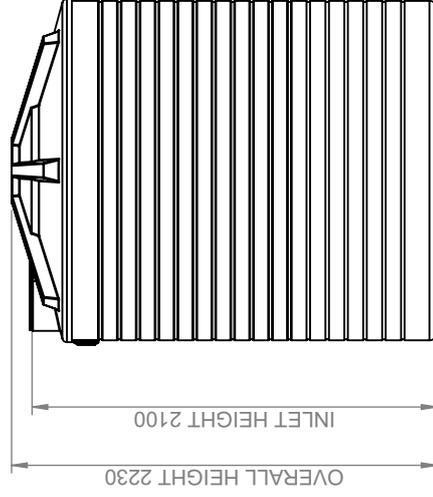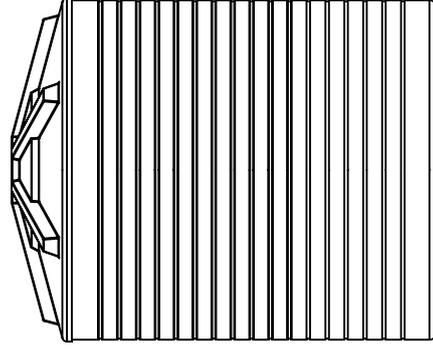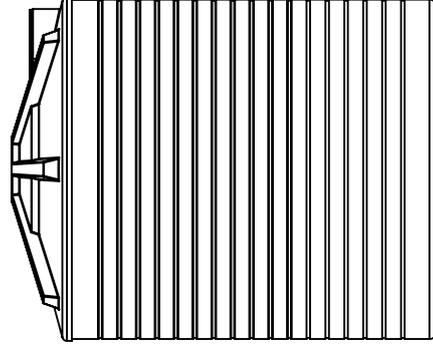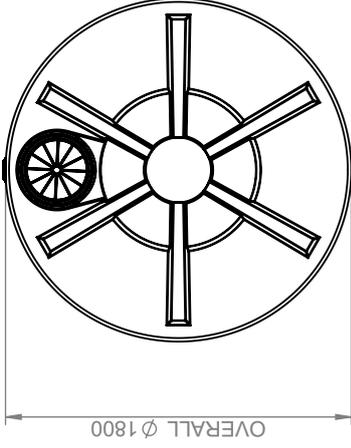OVERALL ⌀ 1800

INLET HEIGHT 2100

OVERALL HEIGHT 2230

nu-tank
CLEAN ∘ STRONG ∘ RELIABLE

PRODUCT CODE: PTRNWA1100TL

DESCRIPTION: 1,100 GALLON / 5,000 LITRE TALL WATER TANK

Details

Manufacturer's Name	Nu-Tank Pty Ltd
Tank Capacity	1100 Gallon
Maximum Specific Gravity	1.0
Maximum Design Service Temperature	23°c
Standard	AS/NZS 4766